

Pudsede facader, U-værdi, 180 mm Kingspan

Exterior wall
created on 1.7.2018

Thermal protection

$U = 0,10 \text{ W/(m}^2\text{K)}$

EnEV Bestand*: $U < 0,24 \text{ W/(m}^2\text{K)}$




Moisture proofing

No condensate



Heat protection


Temperature amplitude damping: 68
phase shift: 12,2 h
Thermal capacity inside: 80 kJ/m²K

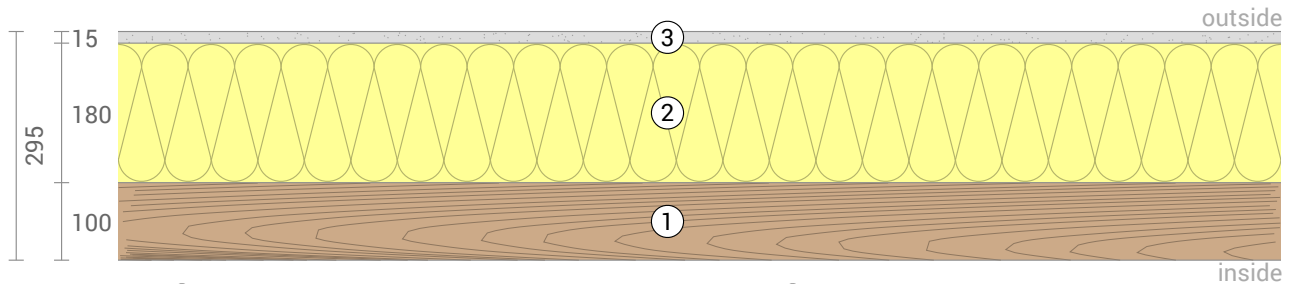

- ① Cross Laminated Timber (100 mm)
- ② Kooltherm® K5 WDVS-Dämmplatte (180 mm)
- ③ Silicone Resin Plaster (15 mm)

Impact of each layer and comparison to reference values

For the following figure, the thermal resistances of the individual layers were converted in millimeters insulation. The scale refers to an insulation of thermal conductivity 0,021 W/mK.

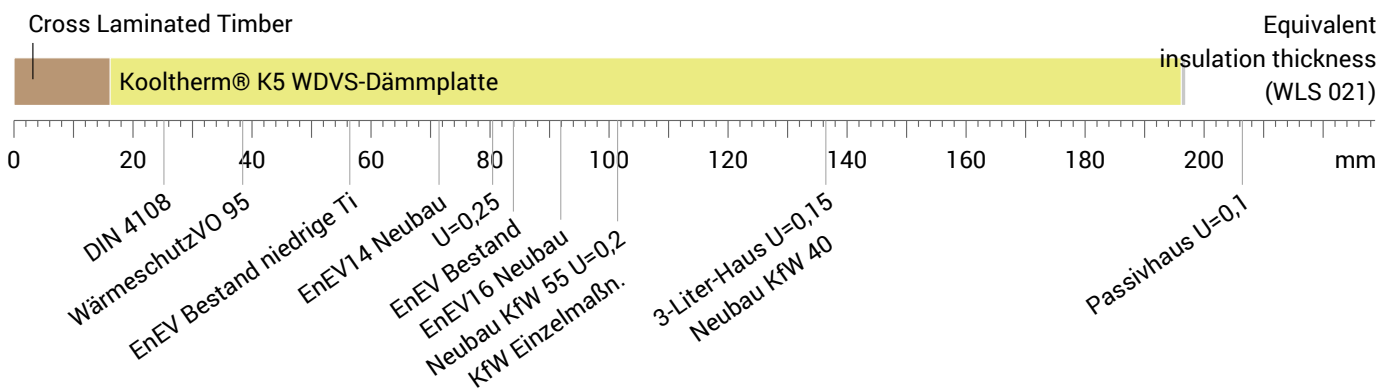


Inside air : 20,0°C / 50%
Outside air: -5,0°C / 80%
Surface temperature.: 19,7°C / -4,9°C

sd-value: 11,3 m

Thickness: 29,5 cm
Weight: 83 kg/m²
Heat capacity: 116 kJ/m²K

Pudsede facader, U-værdi, 180 mm Kingspan, U=0,10 W/(m²K)

Temperature profile

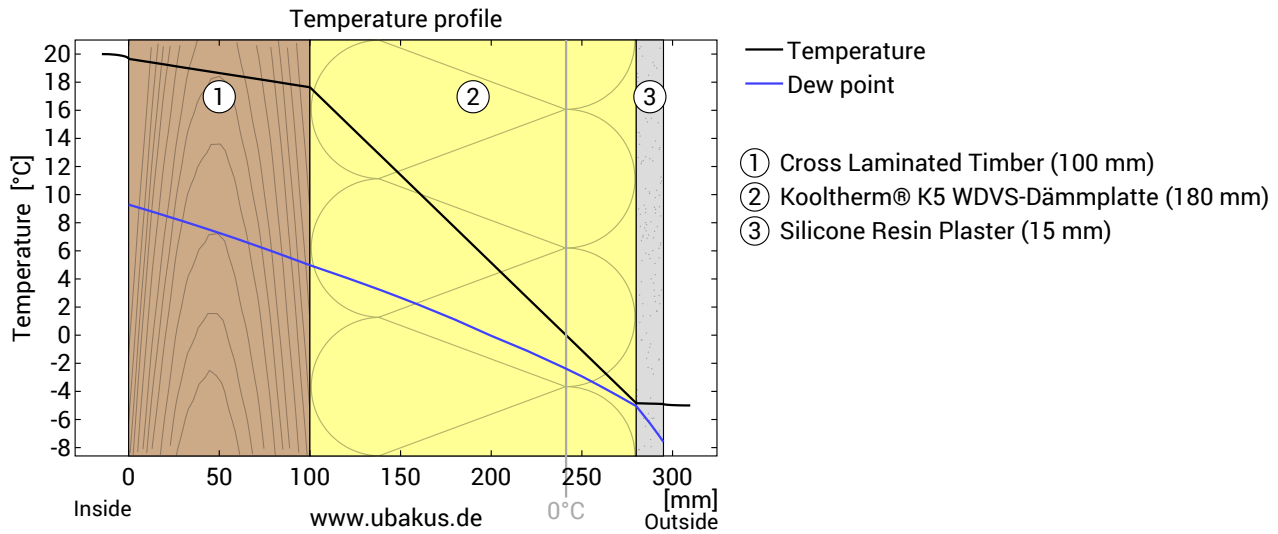

Temperature and dew-point temperature in the component. The dew-point indicates the temperature, at which water vapour condensates. As long as the temperature of the component is everywhere above the dew-point temperature, no condensation occurs. If the curves have contact, condensation occurs at the corresponding position.

Layers (from inside to outside)

#	Material	λ [W/mK]	R [m ² K/W]	Temperatur [°C]		Weight [kg/m ²]
				min	max	
	Thermal contact resistance*		0,130	19,7	20,0	
1	10 cm Cross Laminated Timber	0,130	0,769	17,6	19,7	50,0
2	18 cm Kooltherm® K5 WDVS-Dämmplatte	0,021	8,571	-4,8	17,6	6,3
3	1,5 cm Silicone Resin Plaster	0,700	0,021	-4,9	-4,8	27,0
	Thermal contact resistance*		0,040	-5,0	-4,9	
29,5 cm Whole component			9,532			83,3

*Assuming free circulating air at the inside surface.

Surface temperature inside (min / average / max): 19,7°C 19,7°C 19,7°C

Surface temperature outside (min / average / max): -4,9°C -4,9°C -4,9°C

Pudsede facader, U-værdi, 180 mm Kingspan, U=0,10 W/(m²K)

Moisture proofing


This component is free of condensate under the given climate conditions.

#	Material	sd-value [m]	Condensate		Weight
			[kg/m ²]	[Gew.-%]	[kg/m ²]
1	10 cm Cross Laminated Timber	4,00	-	-	50,0
2	18 cm Kooltherm® K5 WDVS-Dämmplatte	6,30	-	-	6,3
3	1,5 cm Silicone Resin Plaster	1,05	-	-	27,0
	29,5 cm Whole component	11,35			83,3

Humidity

The temperature of the inside surface is 19,7 °C leading to a relative humidity on the surface of 51%. Mould formation is not expected under these conditions.



The following figure show the relative humidity inside the component.

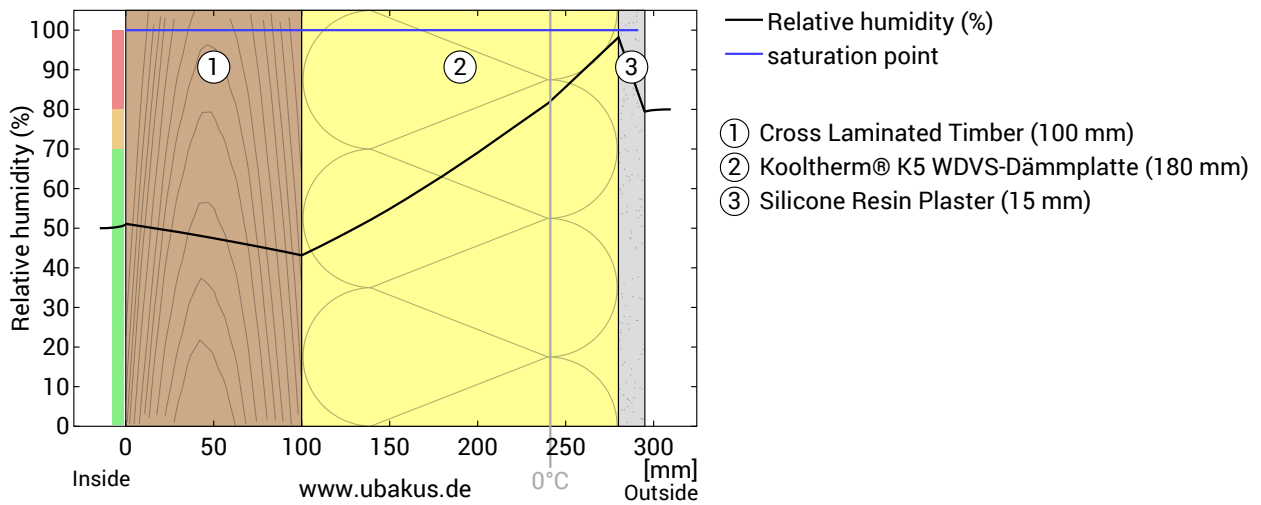

Pudsede facader, U-værdi, 180 mm Kingspan, U=0,10 W/(m²K)

Heat protection

For the analysis of the heat protection, the temperature changes within the component were simulated during a hot summer day:

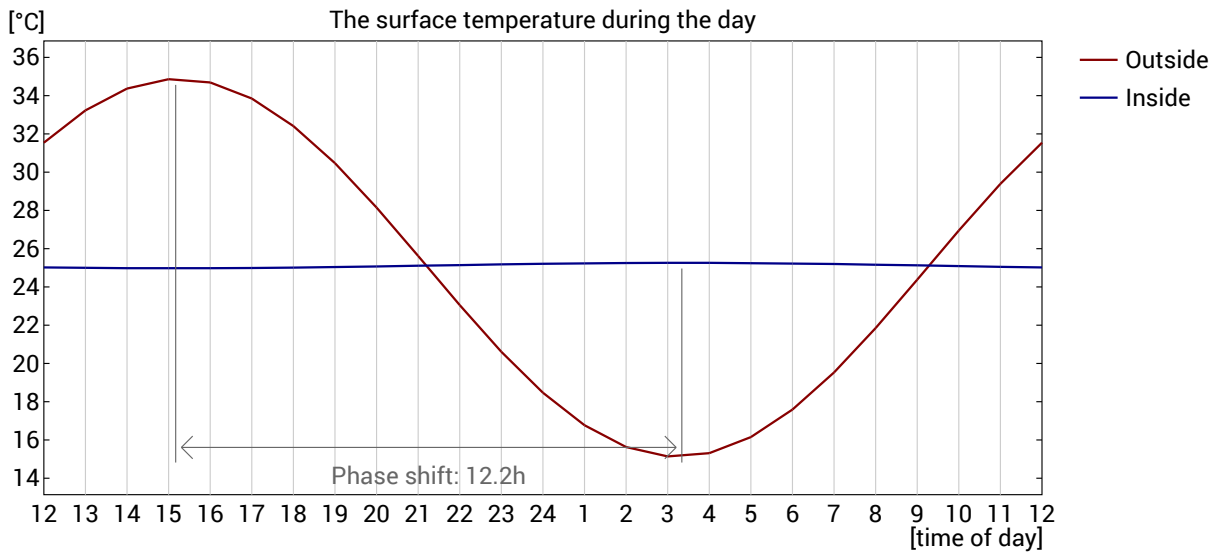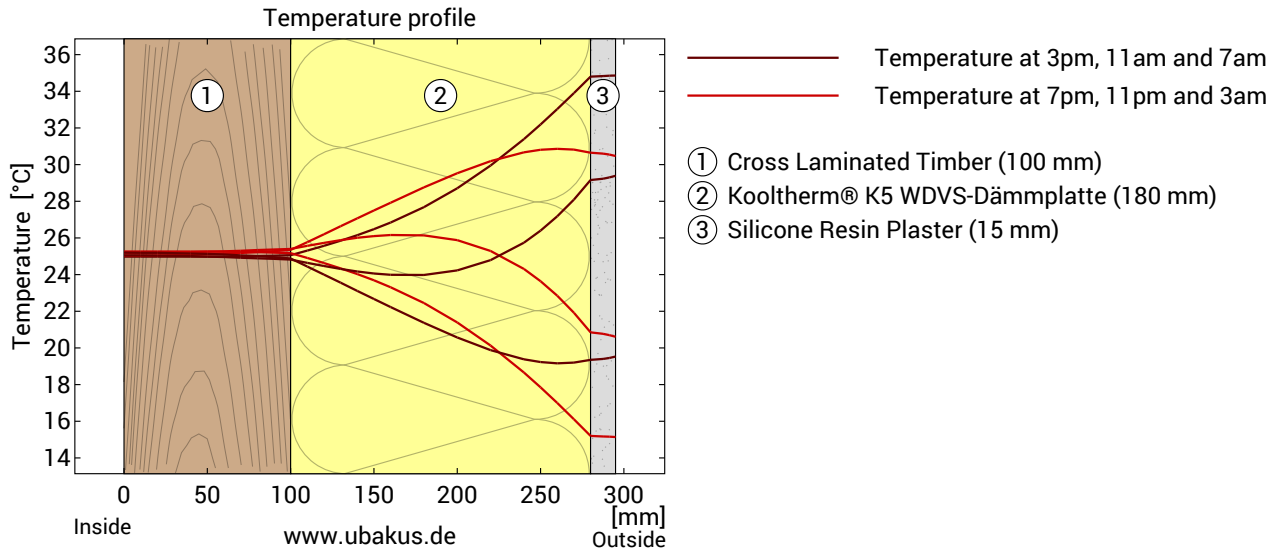

Top: Temperature profile within the component at different times. From top to bottom, brown lines: at 3 pm, 11 am and 7 am and red lines at 7 pm, 11 pm and 3 am.

Bottom: Temperature on the outer (red) and inner (blue) surface in the course of a day. The arrows indicate the location of the temperature maximum values. The maximum of the inner surface temperature should preferably occur during the second half of the night.

Phase shift*	12,2 h	Time of maximum interior temperature	3:15
Amplitude attenuation **	68,5	Thermal fluctuation on exterior surface:	19,8°C
TAV ***	0,015	Temperature fluctuation on interior surface	0,3°C

* The phase shift is the time in hours after which the temperature peak of the afternoon reaches the component interior.

** The amplitude attenuation describes the attenuation of the temperature wave when passing through the component. A value of 10 means that the temperature on the outside varies 10x stronger than on the inside, e.g. outside 15-35 °C, inside 24-26 °C.

*** The temperature amplitude ratio TAV is the reciprocal of the attenuation: TAV = 1 / amplitude attenuation